

Latching Solenoid Coil C60 Series

C60 series coils are specially designed for latching. Latching coils operate with an instantaneous on-off command of approximately 50ms. After the command is given, the coil must be de-energized.

Since the coil does not need to be constantly powered on, the heating problem is eliminated, more stable operation of the products and maximum energy savings are achieved.

GENERAL FEATURES



- New design
- High performance
- Long lasting
- Maximum energy savings
- On-off in 50ms
- Ability to work with 2 or 3 cables
- Ability to work in dusty, humid or watery environments

TECHNICAL FEATURES

Coil Insulation Class	: H (180°C)(IEC 85)
Ambient Temperature	: -10°C, +80°C
Protection Class	: IP67 (IP68 on request)
Cable Connection	: 3x0.75mm ² cable 1.5 meters (different lengths on request)
Supply Voltage	: 24V DC -Maximum 2 Amps 50ms
Body	: Polyamide 6



CONNECTION DIAGRAM

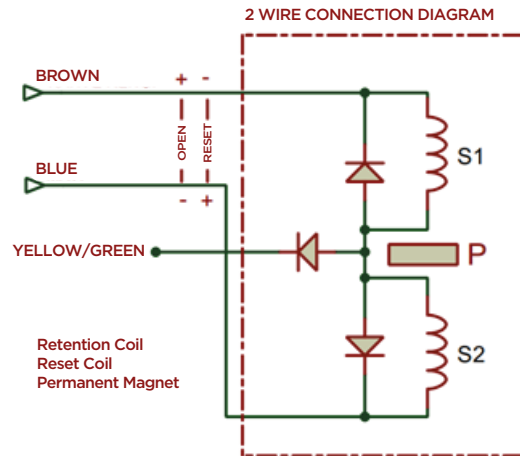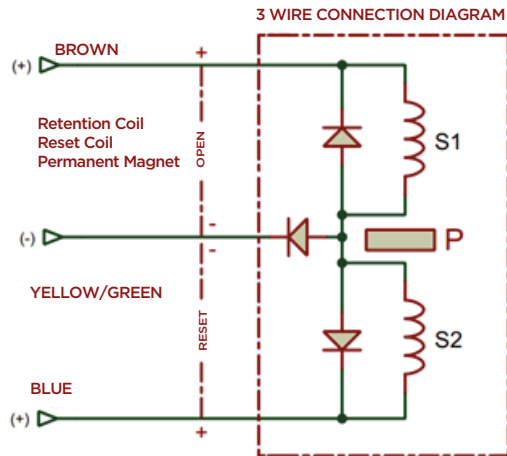

SIZES

