

Pneumatic Proportional 3-Way Control Valve

It is an effectual control element presenting high performance with steam, water, air, oil etc. liquids

It was designed to provide the users with easy maintenance

Its compact design provides a real convenience in terms of installation and assembly / disassembly.


It is supported with a plenty of spare parts and an effectual service

Seat and plug material metal-to-metal, AISI 316, demonstrates high durability against corrosion and wears. Plug tightness element can be selected optionally as PTFE, viton etc. Depending on the application area.

All the materials used have been selected with precision and are presented to our customers after production stage of high quality and required tests. Our products are under 1 year warranty.



- Applications** : Steam, water, air, oil Etc. fluids.
(Your question; Liquids having acid and alkali characteristics)
- Dimensions** : Standart DN15 - DN100
Special DN125 - DN300
- Body** : Standart PN16
Special PN40 - AISI316
- End Connection** : Flanged
- Max. Temperature** : 200°C
- Air Supply Pressure** : 0,2 - 1 bar
0,8 - 2 bar
1,0 - 3 bar
- Actuator** : 300 cm² / 600 cm² / 1000 cm²
- Packing** : Spring - loaded
PTFE V-Ring kit
- Seat Material** : AISI 316
- Plug Material** : AISI 316

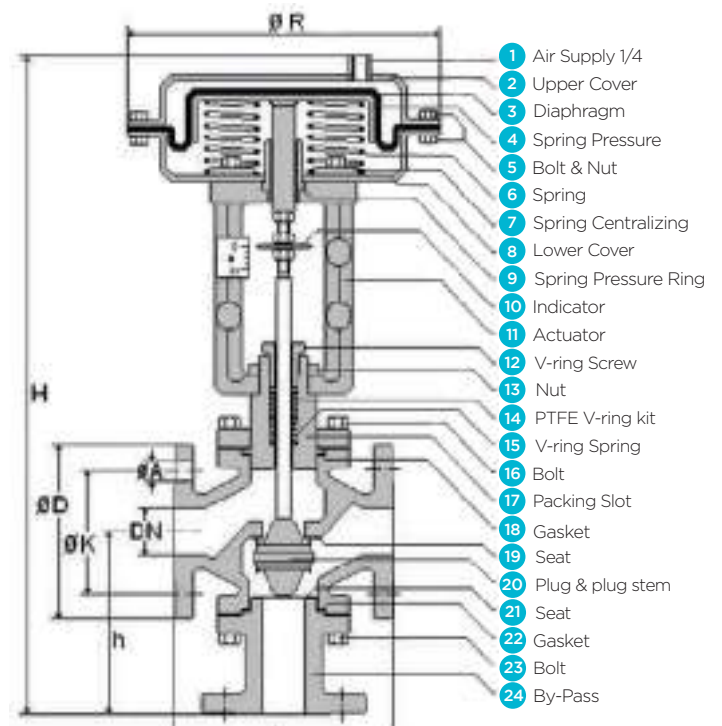

DN	DIMENSIONS							
	H	ØR	h	L	ØD	ØK	ØA	A DELİK
DN 15	540	286	134	130	95	65	14	4
DN 20	515	286	121	150	105	75	14	4
DN 25	515	286	121	160	115	85	14	4
DN 32	545	286	138	180	140	100	18	4
DN 40	555	286	143	200	150	110	18	4
DN 50	575	286	158	230	165	125	18	4
DN 65	635	286 365	195	290	185	145	18	4/8
DN 80	670	286 365	215	310	200	160	18	8
DN 100	735	286 365 450	250	350	220	180	18	8

*600 cm² Activator / **1000 cm² Activator

***PN 16 Body 4 hole / PN 40 Body 8 hole