

Pneumatic On-Off 3-Way Control Valve

It is an effectual control element presenting high performance with steam, water, air, oil etc. liquids

It was designed to provide the users with easy maintenance

Its compact design provides a real convenience in terms of installation and assembly / disassembly. It is supported with a plenty of spare parts and an effectual service

Seat and plug material metal-to-metal, AISI 316, demonstrates high durability against corrosion and wears. Plug tightness element can be selected optionally as PTFE, viton etc. Depending on the application area.

Effectual working even in low air pressures provides quite a big advantage for the operation.

All the materials used have been selected with precision and are presented to our customers after production stage of high quality and required tests. Our products are under 1 year warranty.



Applications : Steam, water, air, oil Etc. fluids.
(Your question; Liquids having acid and alkali characteristics)

Dimensions : Standart DN15 - DN100
Special DN125 - DN300

Body : Standart PN16
Special PN40 - AISI316

End Connection : Flanged


Max. Temperature : 200°C

Air Supply Pressure : 2 bar max.

Packing : Spring - loaded
PTFE V-Ring kit

Seat Material : AISI 316

Plug Material : AISI 316

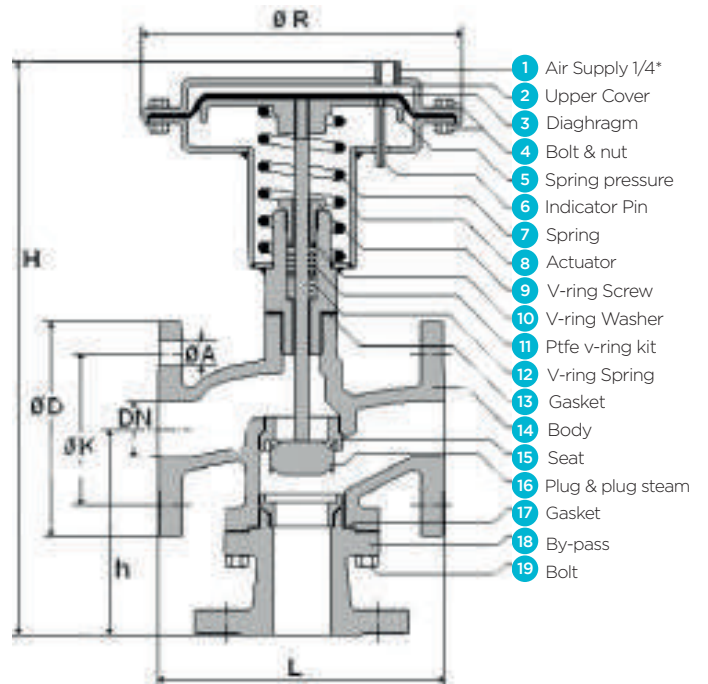

DN	DIMENSIONS							
	H	ØR	L	H	ØD	ØK	ØA	A DELIK
DN 15	350	223	130	118	95	65	14	4
DN 20	360	223	150	137	105	75	14	4
DN 25	355	223	160	115	115	85	14	4
DN 32	380	223	180	128	140	100	18	4
DN 40	385	223	200	135	150	110	18	4
DN 50	415	223	230	153	165	125	18	4
DN 65	625	286	290	180	185	145	18	4/8*
DN 80	660	286	315	200	200	160	18	8
DN 100	725	286	350	245	220	180	18	8

*PN 16 Body 4 hole : PN 40 Body 8 hole