



TORK SWITCH BOX

Technical Specification


- On-Off position indicator
- Compact body
- Ex-proof, II 2G Ex d IIC T4, II 2D Ex tb IIIC Tmax 95 °C Db
- IP66
- Electrostatic dyed aluminium injection body
- 2 pieces cable input NPT 1/2", M20 (On order)
- Easy mounting with namur standard, stainless steel bracket
- Used mechanic switch as standard. On order, can be used proximity switch.
- Working temperature: -20 °C ile +80 °C

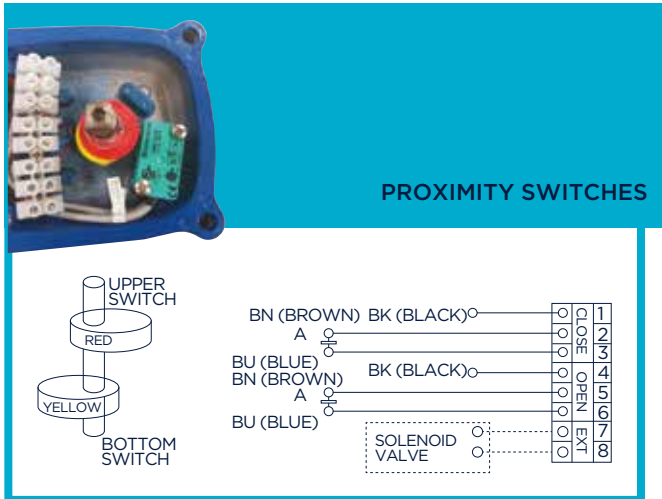

Connection diagram for Proximity switches

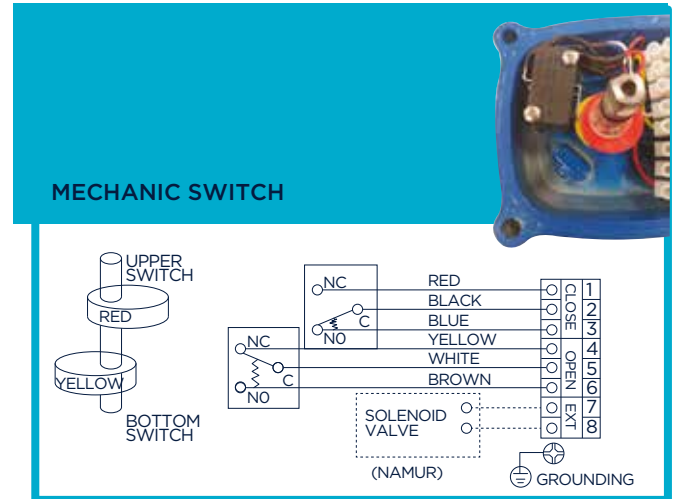

Connection diagram for Mechanic switches

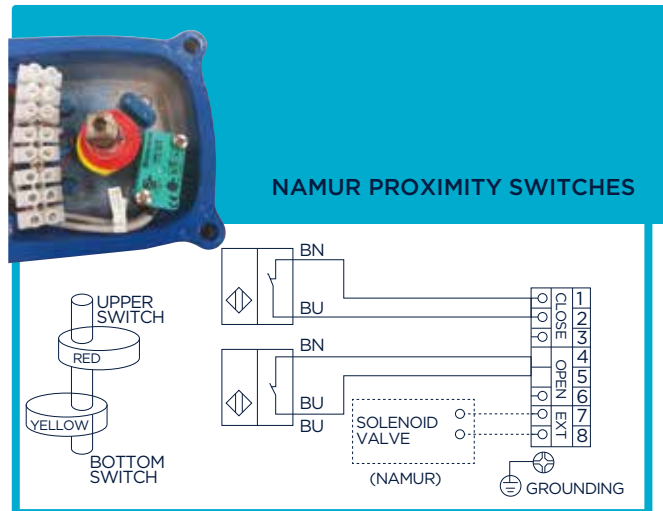

NAMUR Proximity switchler için bağlantı şeması

TORK SWITCH BOX - LS80




LS 80

- IP67 protection class
- Easy installation
- Compact body

NBN3 - F25 - E8

Switch function	Proximity, PNP NO, 4 Cable
Licencing	UL, CSA, CCC
Nominal values	10 - 30 VDC, 0-200mA
Working temperature	-25°C +70°C

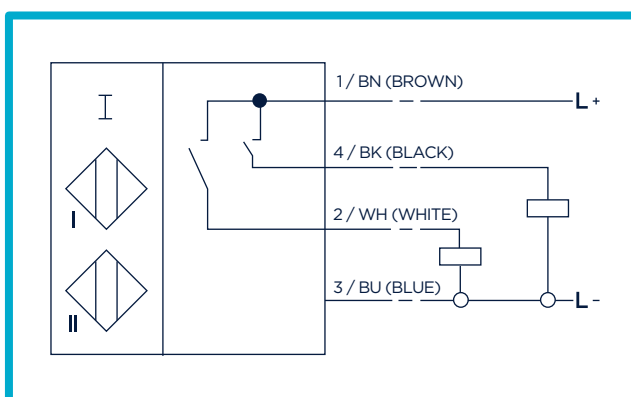

Connection diagram fo magnetic limit switch box