

## Flow switch HR2VK2



- Optimized for use with oil
- Viscosity stabilised
- Solid construction

### Characteristics

Mechanical flow switch for fluid media, with spring-supported piston and magnetic triggering of a reed switch. Robust construction in brass or stainless steel.

### Technical data

<b>Switch</b>	reed switch	
<b>Nominal width</b>	DN 32 / 40 / 50	
<b>Process connection</b>	female thread G 1 <sup>1</sup> / <sub>4</sub> ..G 2 (further process connections available on request)	
<b>Switching range</b>	10..100 l/min	for details see table "Ranges"
<b>Pressure loss</b>	~ 4..7 bar at Q <sub>max</sub>	
<b>Q<sub>max.</sub></b>	up to 160 l/min	
<b>Tolerance</b>	±10 % of full scale value at constant viscosity	
<b>Viscosity-stability</b>	mean deviation ±7 %, max. 18 % (20-330 mm <sup>2</sup> /s) of full scale value	
<b>Pressure resistance</b>	PS 200 bar	
<b>Media temperature</b>	-20..+120 °C	
<b>Ambient temperature</b>	-20..+70 °C	
<b>Media</b>	oil	
<b>Wiring</b>	No. 0.378 normally open (n.o.) not used 	
<b>Switching voltage</b>	max. 230 V AC	
<b>Switching current</b>	max. 0.5 A	
<b>Switch performance</b>	max. 50 VA	
<b>Protection class</b>	2 - Safety insulation	
<b>Ingress protection</b>	IP 67	
<b>Electrical connection</b>	for round plug connector M12x1, 4-pole	

<b>Materials medium-contact</b>	<i>Brass construction:</i> CW614N nickelled, CW614N, 1.4305, 1.4310, hard ferrite	<i>Stainless steel construction:</i> 1.4571, 1.4310, hard ferrite
<b>Non-medium-contact materials</b>	CW614N nickelled, PC, 1.4301,	
<b>Weight</b>	see table "Dimensions and weights"	
<b>Installation location</b>	Standard: horizontal inwards flow from the left; other installation positions are possible; the installation position affects the switching point and range.	


### Ranges

For switching ranges, the details in the table correspond to horizontal inwards flow and decreasing flow rate; for display ranges they correspond to horizontal inwards flow and increasing flow rate.

Switching range l/min oil 20-330 mm <sup>2</sup> /s	Display range l/min oil 20-330 mm <sup>2</sup> /s	Q <sub>max.</sub> Recommended l/min	Pressure loss bar at Q <sub>max.</sub> oil
10 - 25	10 - 60	100	4
15 - 40	20 - 100	120	5
40 - 70	40 - 120	140	5
50 - 100	50 - 150	160	7

Special ranges are available.


### Reference Data:

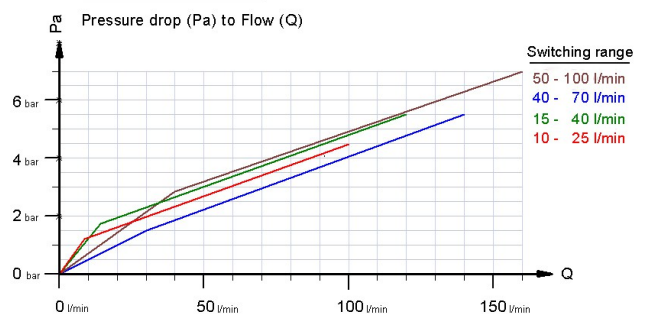

Switching spaces of the flow switch HR2VK1

## Dimensions and weights

DN	G	Types	L	ØD	SW	Ød	X	Weight kg
32	G 1/4	HR2VK2-032GM	130	65	60	51	23	2.6
40	G 1/2	HR2VK2-040GM	170			56	24	3.2
50	G 2	HR2VK2-050GM	185	80	75	70	26	5.3

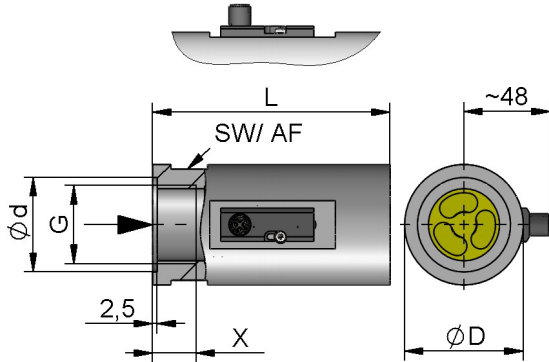

## additional weights for options

Display O1 / Z1 0.05 kg


## Handling and Operation

### Note

- Include straight calming section of 5 x DN in inlet and outlet
- If the media are dirty, install a filter (use magnetic filter for ferritic components).
- It must be ensured that the values given for voltage, current, and power are not exceeded.
- When switched on, a load must be connected in series.
- Under unfavorable pressure conditions, e.g. with a free outlet, there is a risk of cavitation.
- The electrical details apply to ohmic loads. Capacitive, inductive and lamp loads must be operated using a protective circuit.

### Adjustment

If it is necessary to adjust the switching value, the switching head can be adjusted lengthways. When the switching value is reached, the switching unit is fixed in place by a fastening bolt.



## Ordering code

HR2VK2  1.  2.  3.  G  4.  5.

1. Display options	
-	no mechanical display
O1-	with measurement display at side O1
Z1-	with frontal measurement display Z1
2. Nominal width	
032	DN 32 - G 1/4
040	DN 40 - G 1/2
050	DN 50 - G 2
3. Process connection	
G	female thread
4. Connection material	
M	brass
K	stainless steel
5. Switching range H <sub>2</sub> O for horizontal inwards flow	
025	10 - 25 l/min
040	15 - 40 l/min
070	40 - 70 l/min
100	50 - 100 l/min



HR2VK201-



HR2VK2Z1-

## Options

- Special values
- two to four switching heads

## Ordering information

- Specify direction of flow, medium, and switching range.